


QP-02


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)

50 mil

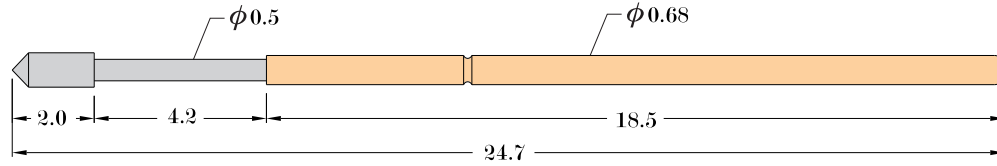


QP-02A1

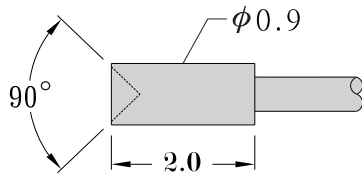


Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Hard Nickel
Barrel	Phosphor Bronze with Gold Plated
Spring	Music Wire with Gold Plated
Receptacle	Phosphor Bronze with Gold Plated


QP-02B




QP-02D




QP-02E1

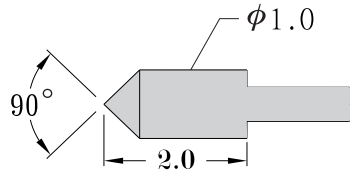


QP-02E2

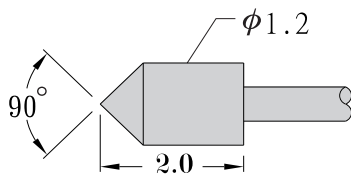

QP-02F

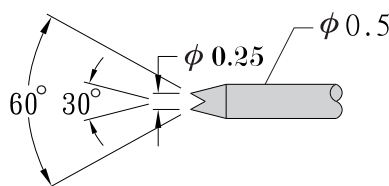

QP-02H



Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Recommended Hole Size
1.27mm	4.20mm	150g	100g	3A	30mΩ	0.95mm

Specification subject to change without notice