
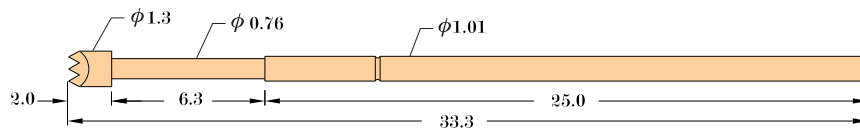


QP-111


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)


75 mil

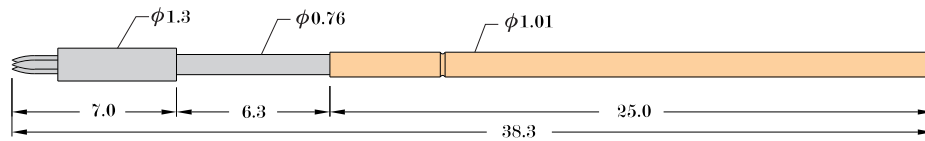

QP-111A



QP-111B(SK4)




Plunger

Beryllium Copper or SK4 with Gold or Rhodium Plated Over Hard Nickel


Barrel

Phosphor Bronze with Gold Plated

QP-111F(SK4)



QP-111F1(SK4)




Spring

Music Wire with Gold Plated


Receptacle

Phosphor Bronze or Brass with Gold Plated


QP-111F2




QP-111H




QP-111K




QP-111M3(SK4)




QP-111M3B(SK4)

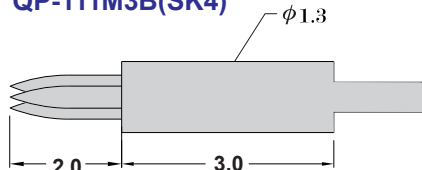

QP-111T1



QP-111T2(SK4)



Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Recommended Hole Size		
						Acrylic	Bakelite G10	Fiber Reinforce Plastic

1.90mm

6.30mm

250g

170g

3A

30mΩ

1.35mm

1.40mm

1.40mm

Specification subject to change without notice