



# QP-25

SERIES PRECISION PROBES  
m.m. (Dimensions in millimeter)


# 100 mil

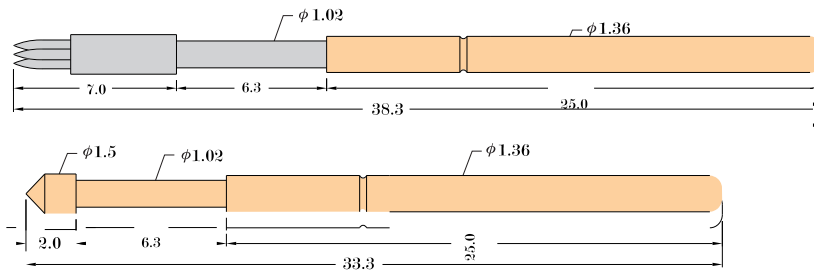


**QP-25A**




**QP-25B**




**QP-25D**




**QP-25E**



**QP-25E1**

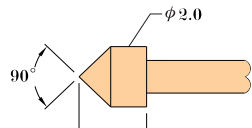


**QP-25F(SK4)**

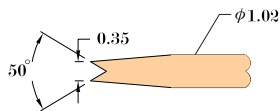


Plunger	Beryllium Copper or SK4 with Gold or Rhodium Plated Over Hard Nickel
Barrel	Phosphor Bronze or Brass with Gold Plated
Spring	Music Wire with Gold Plated
Receptacle	Phosphor Bronze or Brass with Gold Plated


**QP-25F1(SK4)**

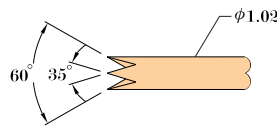


**QP-25F2**

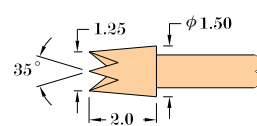


**QP-25H**

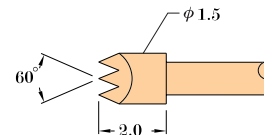


**QP-25H1**

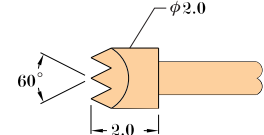


**QP-25H3**

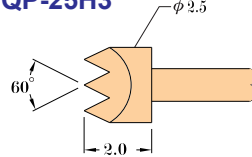


**QP-25H5**

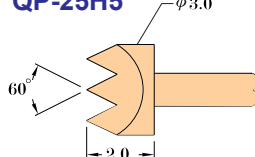


**QP-25K**




**QP-25Q1**




**QP-25M3**

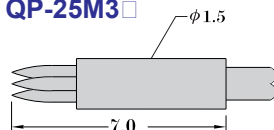


**QP-25M3B**

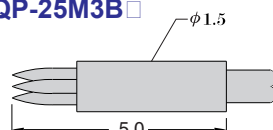

**QP-25T1(SK4)**



**QP-25T2**

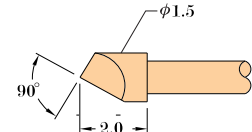

Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Recommended Hole Size		
						Acrylic	Bakelite G10	Fiber Reinforce Plastic
2.54mm	6.30mm	350g	230g	3A	30mΩ	1.70mm	1.75mm	1.75mm

Specification subject to change without notice