


QSP-9


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)


125 mil

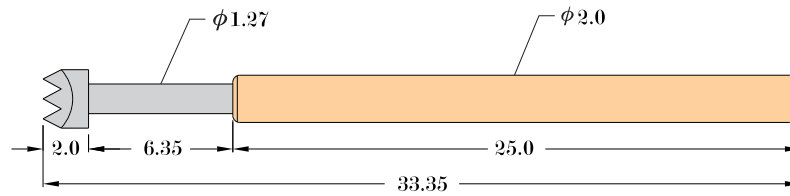


QSP-9A




QSP-9B



QSP-9F




QSP-9H




Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Hard Nickel
Barrel	Brass with Gold Plated
Spring	Stainless Steel
Receptacle	Brass with Gold Plated


QSR-9VC

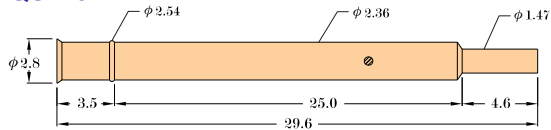


QSR-9V-1

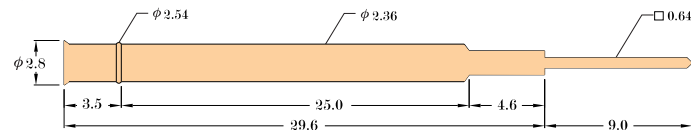

QSR-9WC

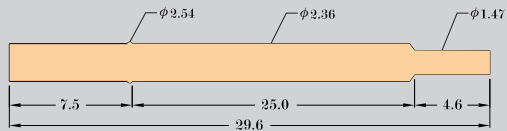

QSR-9W-1

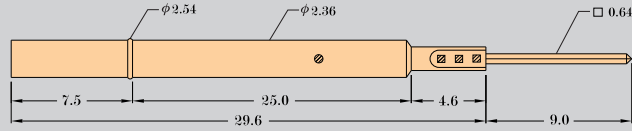

Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Recommended Hole Size		
						Acrylic	G10 Bakelite	Fiber Reinforce Plastic
3.17mm	6.35mm	150g	100g	5A	30mΩ	2.40mm	2.45mm	2.45mm

Specification subject to change without notice