

# QTP


## SERIES PRECISION PROBES

# Rotator Probe

m. m. (Dimensions in millimeter)


The tip of rotator probe will rotate 70 degree when it travels 2/3 stroke to penetrate the insulation flux in order to achieve good contact to the board.

### 100 mil

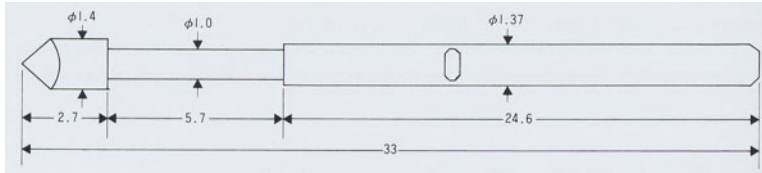


Plunger	SK (Au) (Rh)
Barrel	Nis
Force	180g (2/3 stroke)
Receptacle	Using QR-25 Series


QTP-25B

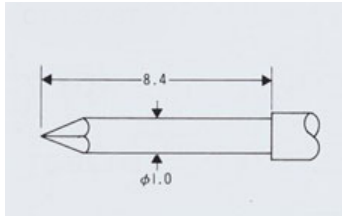


QTP-25E

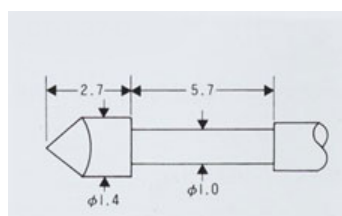


QTP-25F

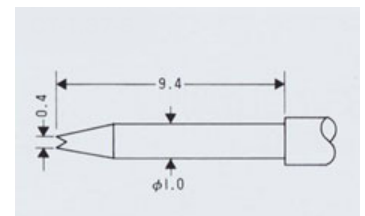

QTP-25F1

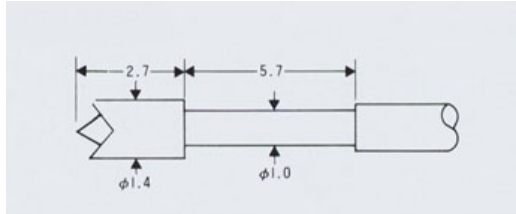

QTP-25H

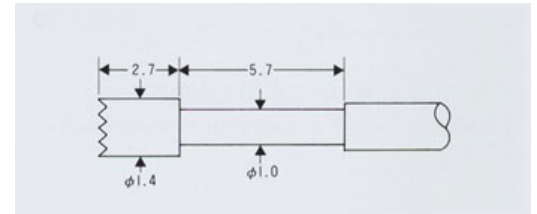


### 75 mil




Plunger	SK (Au)
Barrel	BST (Au)
Force	140g (2/3 stroke)
Receptacle	Using QR-111 Series


QTP-111B

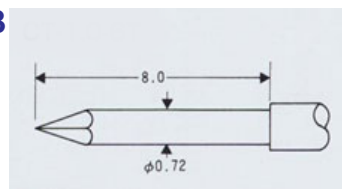


QTP-111E

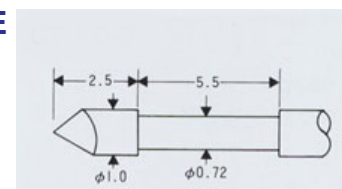

QTP-111F

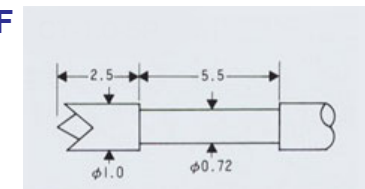


### 50 mil

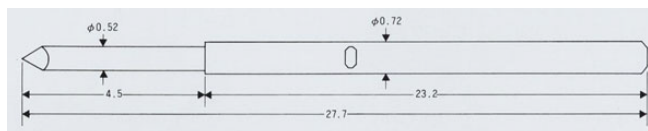

Plunger	SK (Rh)
Barrel	NST (Au)
Force	50g (2/3 stroke)
Receptacle	Using QR-82 Series

QTP-82B

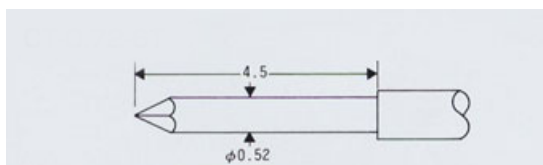

QTP-82T

